




Samsung Galaxy Tab A 9.7 Battery Replacement

Use this guide to replace the Samsung Galaxy Tab A 9.7 battery.

Written By: Paulina Nguyen

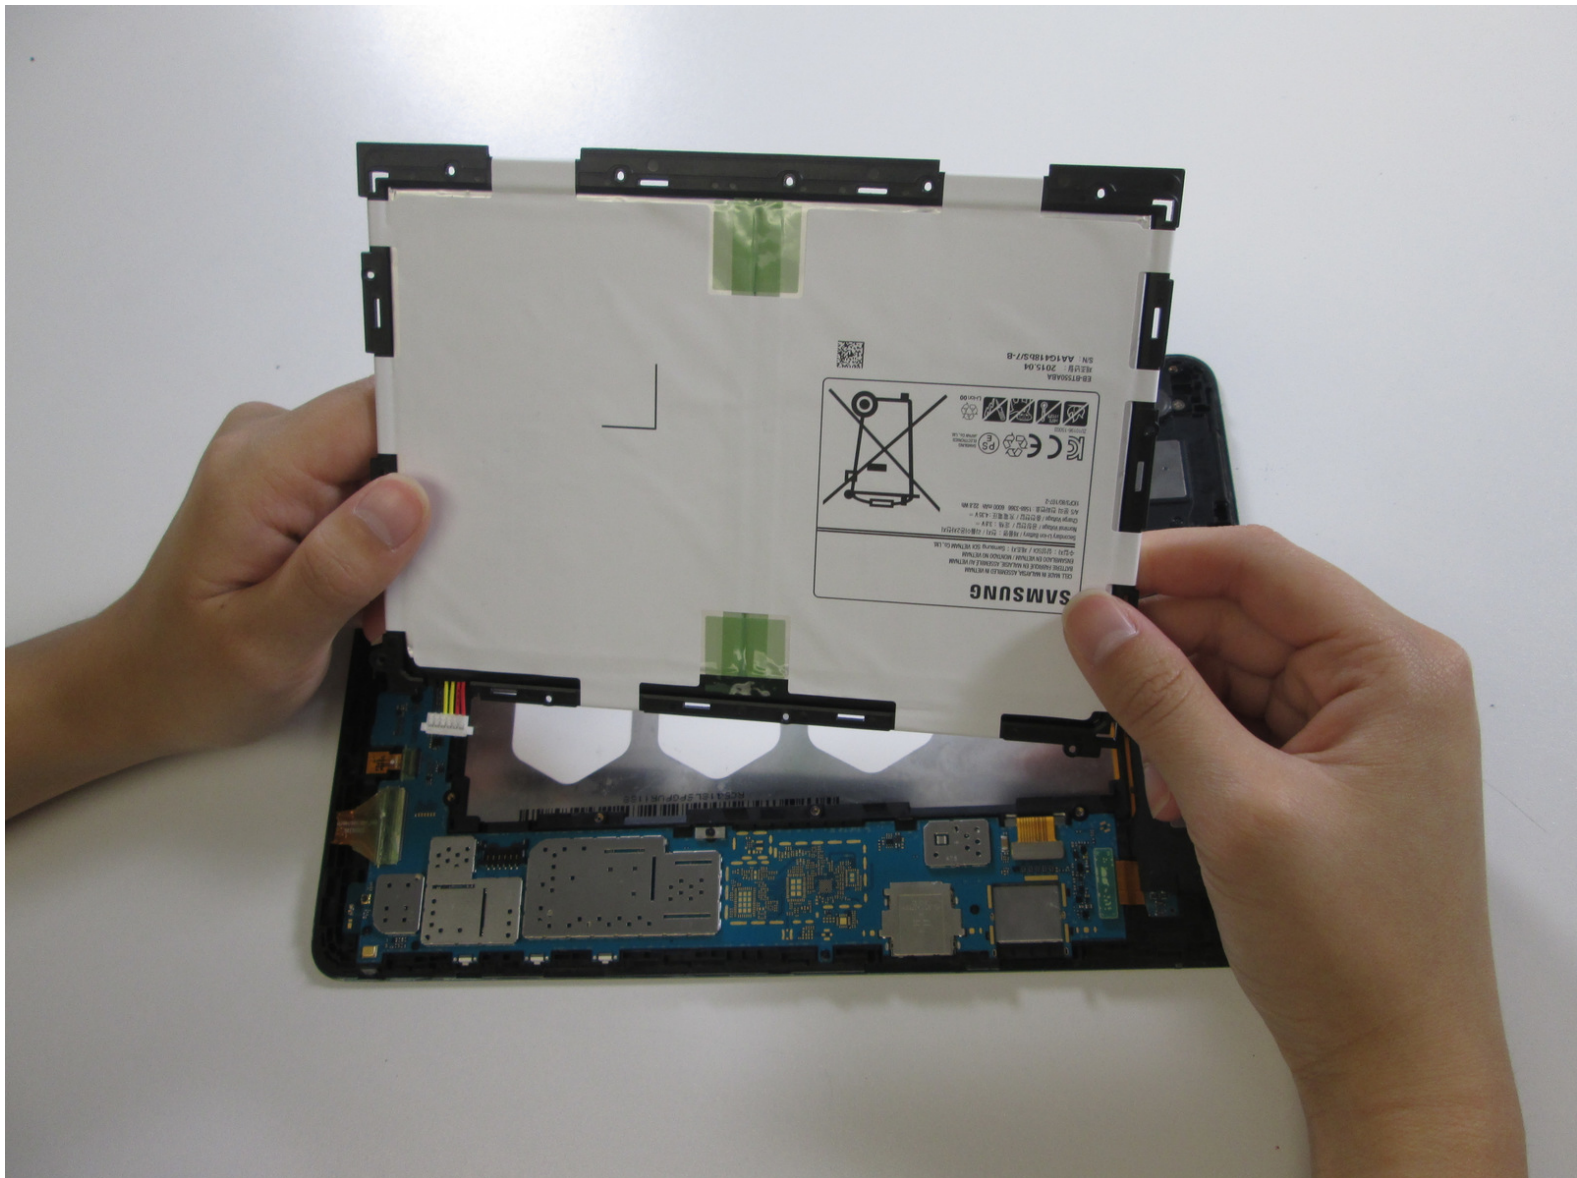

INTRODUCTION

Bring new and uninterrupted life back to your beaten and dead Samsung Galaxy Tab A 9.7 through the replacement of the battery inside the device.



TOOLS:

- [Metal Spudger](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Phillips #000 Screwdriver](#) (1)



PARTS:



- [Galaxy Tab A 9.7 Battery](#) (1)
- [Galaxy Tab A 9.7 Rear Panel](#) (1)

Step 1 — Back Cover




- Insert a metal spudger between the back case and the screen of the device.
- ⓘ The back cover is attached to the device by a series of snaps. The snaps are positioned about an inch from each other.
- Move the spudger along the perimeter of the device while it is in between the back case and the screen to open each snap.
- ⓘ There will be an audible click every time a snap releases.

Step 2 — Battery

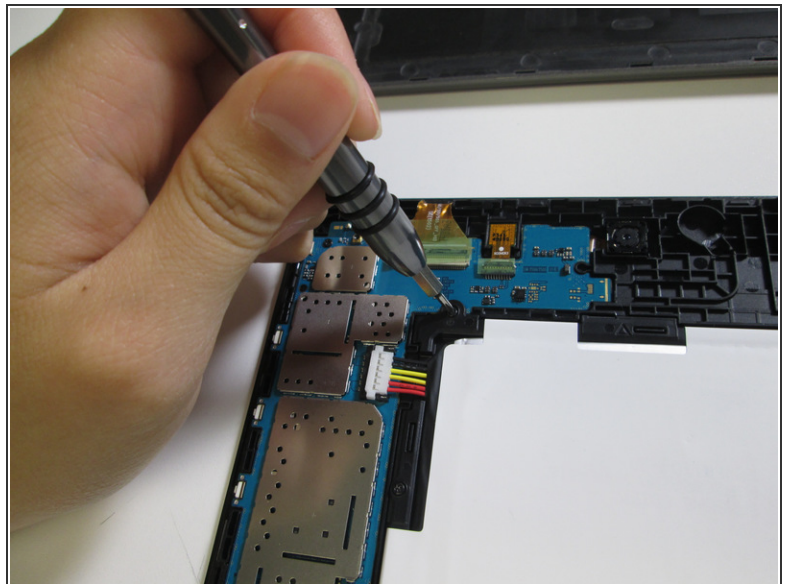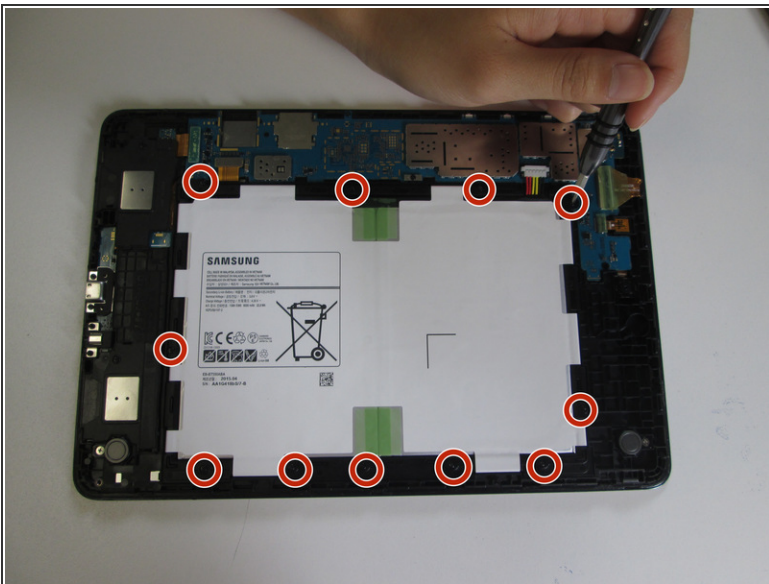



- Remove the eleven #000 Phillips 2.8mm screws that hold the battery in place.

Step 3

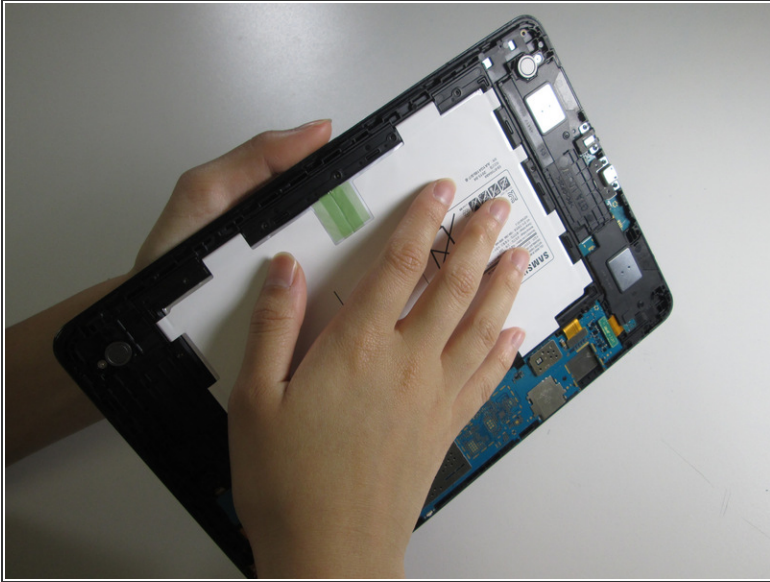



- Place one hand on the battery and grasp the outer edge of the device with the other hand.
- Flip the device over so that the battery falls over and onto your hand.

Step 4

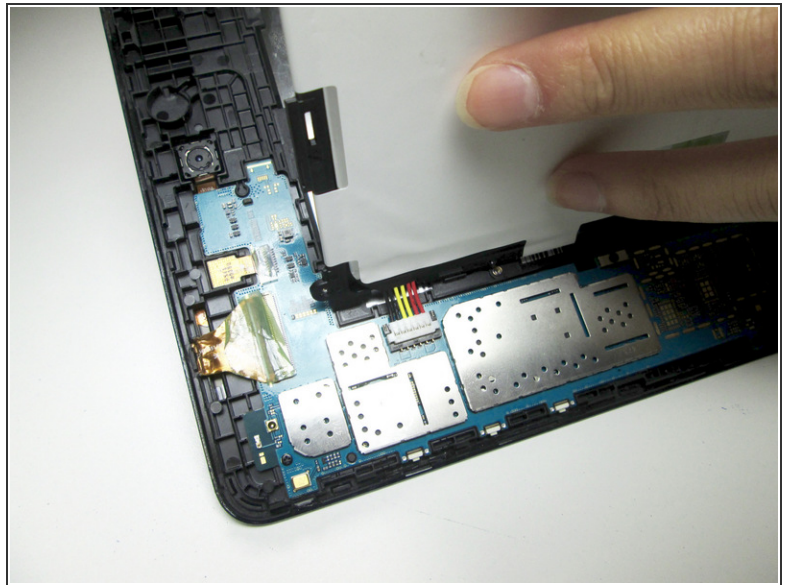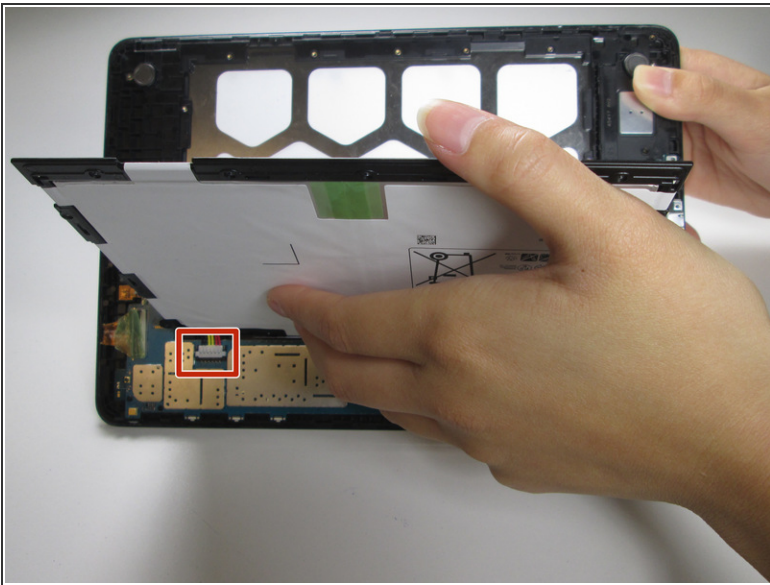

- Pull the battery out until it is only connected to the device by the black, yellow, and red connectors.

Step 5

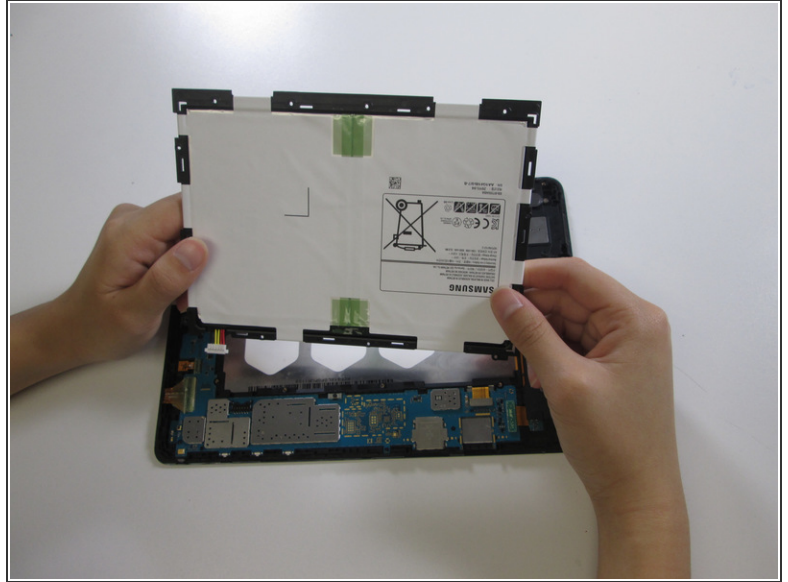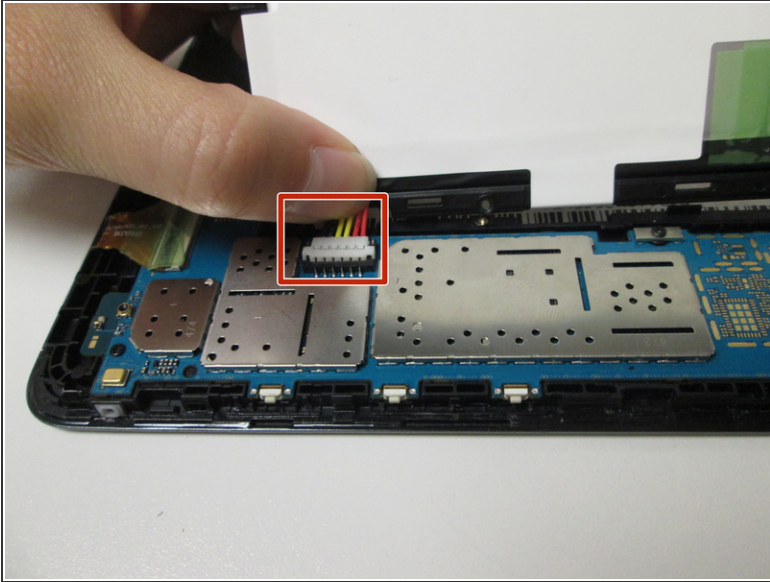

- Hold the battery and grip the wires with your thumb and finger.
- Pull the wires away from the device to remove the white connector from the black socket.
- Lift the battery away from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-24 10:35:23 PM.